



INSTALLATION INSTRUCTIONS FOR MODELS:

G-CDC	Glass Cat Door Clear
G-CDW	Glass Cat Door White
G-MCD	Glass Magnetic Cat door White

Before installing this cat flap please read the following instructions carefully



WARNING Cutting holes in glass can be both hazardous and costly if not carried out by a professional. In order to avoid costly repairs or injury, we suggest that you contact your local glazier or cat door installer.



PLEASE NOTE: You must not try to cut a hole in either toughened glass or double glazed glass because of their special properties. For these types of glass the hole must be cut prior to manufacture.





FITTING TO GLASS: No screw holes are required in the glass, as the screws are connected to both the external and internal sections within the glass cut out area.




SECURITY PIN ENCLOSED


MEASURING AND MARKING

 Measure the belly (stomach) height of your cat (this is normally 100mm to 150mm – 4” to 6”), depending upon the breed.

 On the outside of your door or window, mark the belly (stomach) height of your cat from the floor onto the door and scribe a circle on of **245 mm (9 5/8”)**, starting from the base line as illustrated.

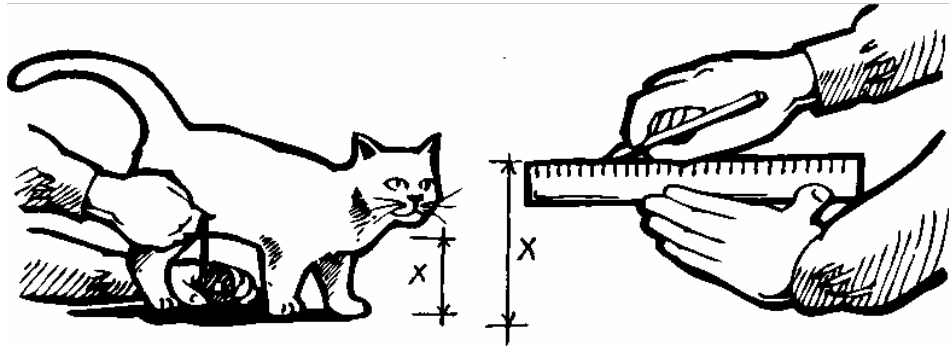

USING THE FOUR-WAY LOCK

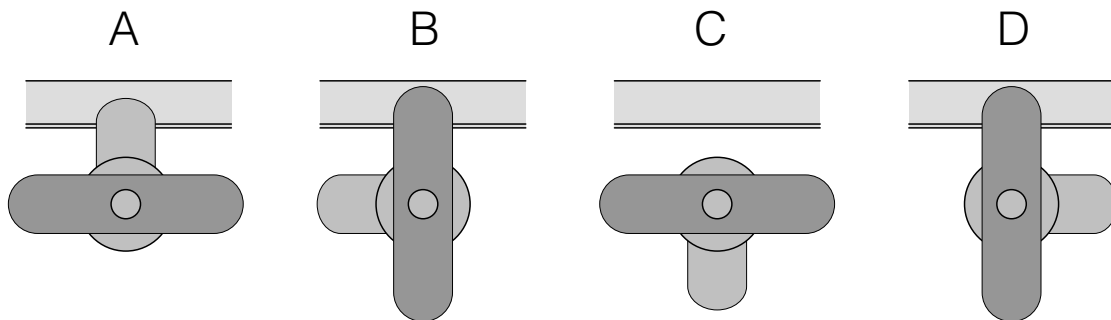

The four-way lock allows you to control the cats access in and out of your home.

(A) In Only (B) Out Only (C) In or Out (D) Fully Locked